

Ultra-Flo® HP-S430C

Hollow Fibre Ultra-Filtration Membrane



- ✓ Easy to Operate
- ✓ Small footprint (26cm x 60cm x 170cm)
- ✓ High mobility and light weight (20kg)
- ✓ High flow rate (0.5 m3/hr)*
- ✓ No electricity required (hand pump)
- ✓ Remove : Bacteria, Suspended particulates, Colloidal, High molecular weight material

System includes:


- S430 Ultra-Flo® membrane cartridge
- C430 carbon cartridge
- Manual hand pump
- Stainless steel frame
- PVC piping, hoses and quick couplings

System & Operating Specifications:

Configuration	Hollow Fibre
Operation Process	Dead-end filtration In to Out mode
Recovery	90 ~ 95 %*
Operating Temperature	< 50° C

* Subject to feed water condition

Note: Ultra-Flo Pte Ltd reserves the right to make any changes to the information provided above without prior notice.

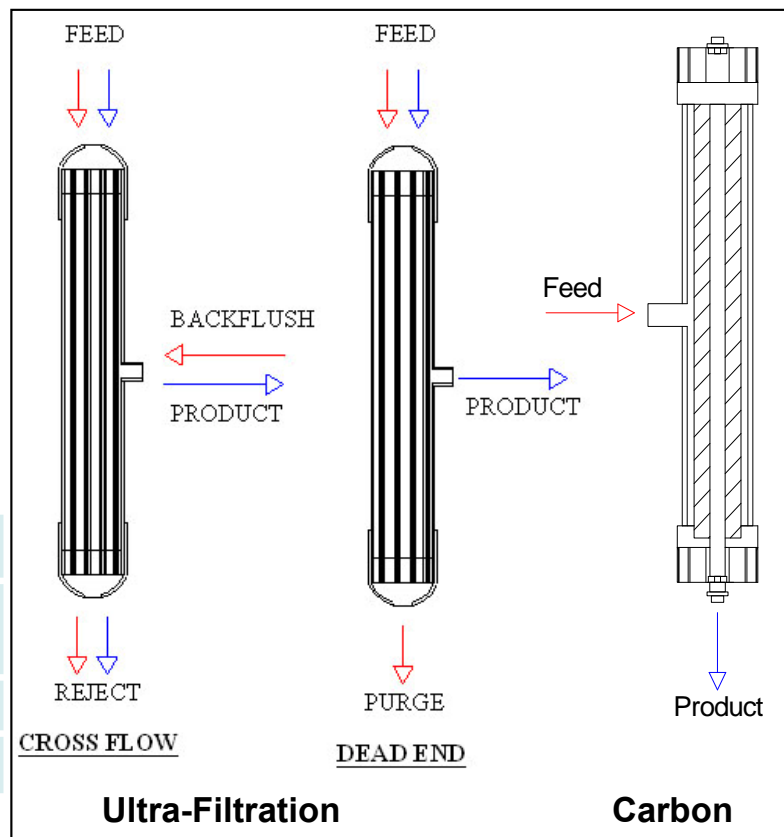

International Water Association

Ultra-Flo Pte Ltd
 2 Tuas Avenue 10
 Singapore 639126
 Tel: +65 6457 7533
 Fax: +65 6457 7517