


Ultra-Flo[®] S430 CARTRIDGE

Hollow Fibre Ultra-Filtration Membrane

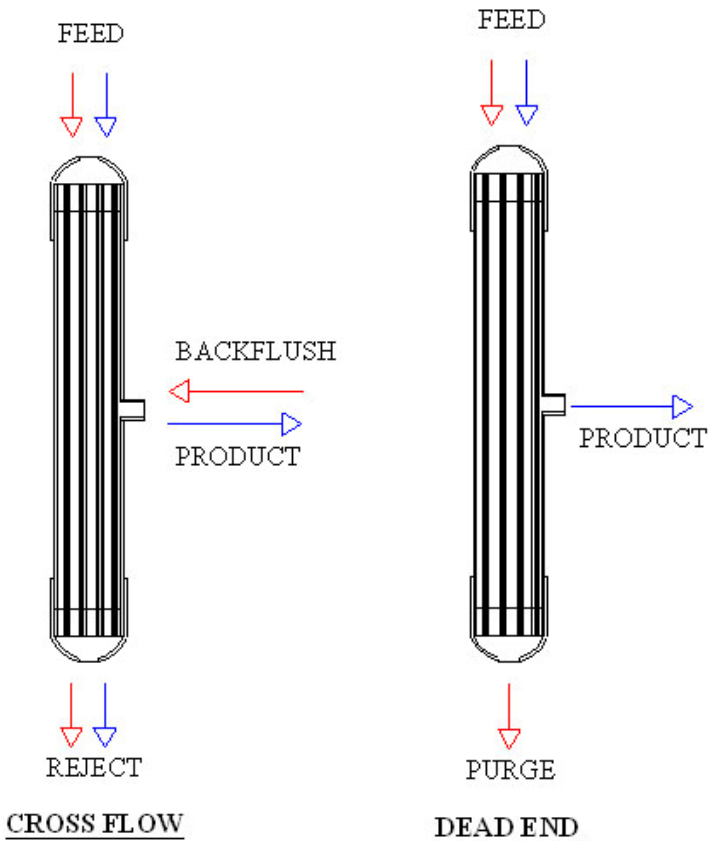

Specifications

Configuration	Hollow Fibre
Material	Hydrophilic modified PAN
Fibre Size	2 mm OD
Surface Area	40 sq ft
Housing	Dia 4" x 30"
Weight	6.5 kg
Operating Temperature	< 50 °C
Operating Pressure (TMP)	< 8 psi (Feed) < 14 psi (Back Flush)
pH	3 ~ 9 (Operating) 2 ~ 11 (Washing)
Flow/Flux Rate	
City Water	800 lit/h (125gfd)*
River/Bore Hole	400 lit/h (62 gfd)*

* Subject to feed water condition

Note: Ultra-Flo Pte Ltd reserves the right to make any changes to the information provided above without prior notice.

Operating Process

Filtration (In to Out)	Re-generation
Cross Flow Dead End	Cross Flow Back Flushing Period Purging



International Water Association

Ultra-Flo Pte Ltd
 2 Tuas Avenue 10
 Singapore 639126
 Tel: +65 6457 7533
 Fax: +65 6457 7517